

# T-FAST® wood screw JW2-ST5-6.0xL




### Application range

- > Pre-drilled and non-pre-drilled fixings of timber or wood-based materials to timber substrates in weather-protected areas
- > Suitable for fastening over-rafter insulation systems
- > Ideal solution for fixing rafters onto purlins


### Properties

- > Carbon steel with zinc-plated surface, 5 µm plating thickness
- > Wafer head increases the pull-through capacity
- > Partial thread with end mill at the transition to the non-threaded part reduces the installation torque and simplifies the installation process
- > Optimised thread geometry for extremely fast processing
- > Aggressive tip attack ensures quick gripping and enables fast processing

### Applications



### Technical data




### Certifications



### Cross references

Bit hexalobular TX20  
Cordless screwdriver ASCS 6.3

### JW2-ST5-6x80/48-V T30

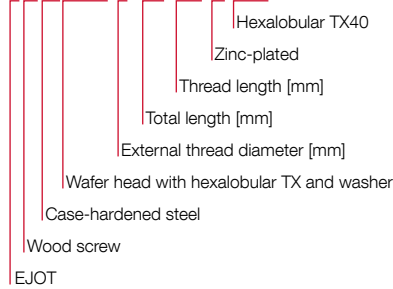

### Product online



Order description	Length [mm]	Thread length [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
T-FAST JW2-ST5-6x80/48-V T30	80	48	250		3820000029	4061245073941
T-FAST JW2-ST5-6x100/60-V T30	100	60	250		3820000030	4061245073958
T-FAST JW2-ST5-6x120/70-V T30	120	70	250		3820000031	4061245073965
T-FAST JW2-ST5-6x140/70-V T30	140	70	250		3820000032	4061245073972
T-FAST JW2-ST5-6x160/70-V T30	160	70	100		3820000033	4061245073989
T-FAST JW2-ST5-6x180/70-V T30	180	70	100		3820000034	4061245073996
T-FAST JW2-ST5-6x200/70-V T30	200	70	100		3820000035	4061245074009
T-FAST JW2-ST5-6x220/70-V T30	220	70	100		3820000036	4061245074016
T-FAST JW2-ST5-6x240/70-V T30	240	70	100		3820000037	4061245074023
T-FAST JW2-ST5-6x260/70-V T30	260	70	100		3820000038	4061245074030
T-FAST JW2-ST5-6x280/70-V T30	280	70	100		3820000039	4061245074047
T-FAST JW2-ST5-6x300/70-V T30	300	70	100		3820000040	4061245074054